




## VS1506 Wireless Alphanumeric LED Display

The VS1506 is a two-line wireless alphanumeric LED display that provides easy time and message viewing to accommodate a wide variety of application environments. Each VS1506 wireless display is assigned a unique ID code to receive its own addressable messages. The VS1506 can also be assigned additional codes to receive group messages with other LED displays.

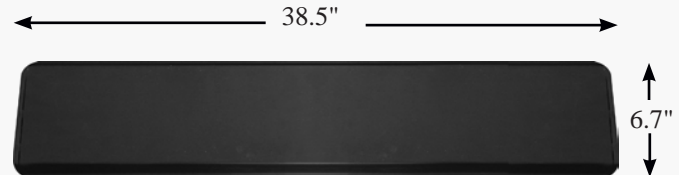

### Specifications:

<b>Dimensions:</b>	38.5"L x 6.7"H x 2.5"D	<b>LED size &amp; color:</b>	2.5" Ultra-Bright Tri-color
<b>Weight:</b>	7.30 lb.	<b>Frequency:</b>	148-174Mhz, 400-470MHz
<b>Power:</b>	120VAC, 60Hz 30-Watt 5V / 4A Power Adaptor	<b>Paging format:</b>	POCSAG, Narrow band
<b>Operating Temperature:</b>	32° to 120°F	<b>Data Baud rate:</b>	512 or 1200 BPS
<b>Humidity:</b>	0%-95% Non-condensing	<b>Receiver Sensitivity:</b>	10uV/M
<b>Frame and lens:</b>	Black metal frame with clear acrylic lens	<b>Channel spacing</b>	12.5KHz
<b>Viewing distance:</b>	Up to 100 feet	<b>Paging addresses:</b>	Six capcodes
<b>Data format:</b>	Two lines - 24 characters each	<b>Limited Warranty</b>	One-year Parts and Labor