




VS1522 Wireless LED Display with PA Speaker

The VS1522 is a unique wireless alphanumeric LED display that comes with a built-in Public Address speaker to provide easy time, voice and data messaging to accommodate a wide variety of application environments. Each VS1522 wireless unit is assigned a unique ID code to receive its own addressable messages. The VS1522 can also be assigned additional codes to receive group voice and alphanumeric messages with other PA speakers and LED displays.

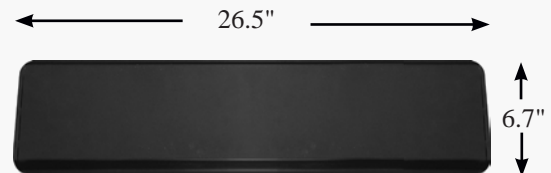

Specifications:

Dimensions:	26.5"L x 6.7"H x 2.5"D	LED size & color:	2.5" or 5.0" Red
Weight:	6.50 lb.	Frequency:	148-174Mhz, 400-470MHz
Power:	120VAC, 60Hz 30-Watt 5V / 6A Power Adaptor	Paging format:	POCSAG, Narrow band
Operating Temperature:	32° to 120°F	Data Baud rate:	512 or 1200 BPS
Humidity:	0%-95% Non-condensing	Receiver Sensitivity:	10uV/M
Frame and lens:	Black metal frame with clear acrylic lens	Channel spacing:	12.5KHz
Viewing distance:	Up to 100 feet	Audio power:	20 Watt
Data format:	Two lines - 12 characters each or one double-sized line	PA Capabilities:	Live voice or eight (8) internal pre-programmed tone alerts and voice prompts
		Paging addresses:	Six capcodes
		Limited Warranty:	One-year Parts and Labor