

CT102

WIRELESS PANIC BUTTON

Instant Audio/Visual Alerts

Simple Operation, User-Programmable Alerts, Fully Supervised

The CT102 panic button is a wearable compact transmitter that can instantly notify staff members when help is needed or initiate a facility-wide alert during emergency situations. With its two button design, the CT102 offers two independent, user-programmable event activations. It can be used in a stand-alone configuration that can directly activate wireless PA speakers to play a pre-programmed voice message, trigger wireless beacon and/or corridor lights to provide visual alert and send a detailed text message to wireless LED message boards or staff pager. When operating as part of a paging base station, the CT102 can, in addition to the above, send SMS text messages to staff member cell phone as well as provide full supervision capabilities and low battery alerts to ensure reliable operation at all times.

The CT102 panic button is offered with optional bead necklaces or belt clips. Equipped with a built-in, long lasting Lithium battery, the CT102 provides years of maintenance-free operation.



CT102 KEY FEATURES



AUDIO ALERTS
Activate PA Messages



VISUAL ALERTS
Control Beacon Lights and
LED Message Boards



ALERTS ANYWHERE
Detailed Phone or Pager
Text Alerts



LONG RANGE
Up to 300' Range



WEARABLE
Bead Necklace or Belt Clip
Option



LOW MAINTENANCE
Long-Life Lithium Battery



VISIPILEX


1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPILEX.COM

WEB: WWW.VISIPILEX.COM

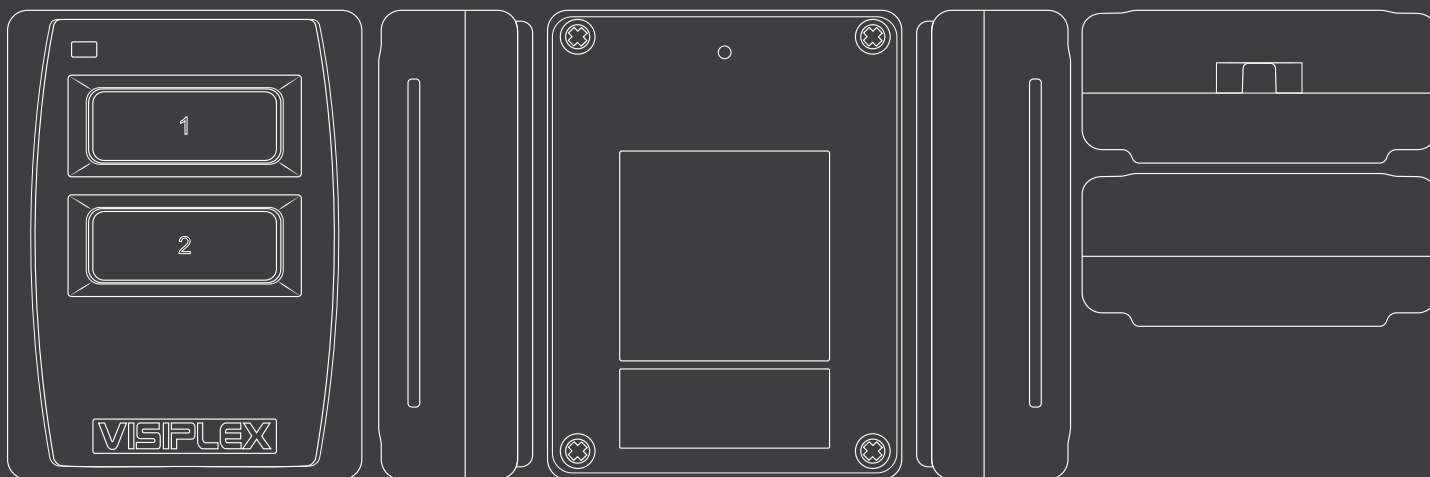

CT102 SPECIFICATIONS

Parameter	Description
Color	Off-white body, Grey buttons
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	1.8" x 2.4" x 0.8", 46mm x 61mm x 20mm (W x H x D)
Weight	1.6oz, 45g
Power	Single CR2 3V Lithium battery
Operating Conditions	Temperature 10°-130°, Humidity 0-90% non-condensing
RF Power	10 mW
Programming	PC Based programming
Call Cancel	Internal Magnetic Switch
Signalling Time	2-4 Seconds
Stability	Better than 5 PPM
Paging Format	POCSAG, 512, 1200 or 2400 BPS
Channel Spacing	12.5 KHz - Narrow Band
Activation Codes	Calls, Cancel & Low Battery
Options	WPA-1005 (Bead Necklace), WPA-1011 (Belt Clip), WPA-1025 (Programming Cable)
Warranty	One Year Limited Warranty



VISIPLEX

1287 BARCLAY BLVD

BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM