

# CT104

## WIRELESS PANIC BUTTON

### Instant Audio/Visual Alerts

*Simple Operation, User-Programmable Alerts, Fully Supervised*

The CT104 panic button is a wearable compact transmitter that can instantly notify staff members when help is needed or initiate a facility-wide alert during emergency situations. With its four button design, the CT104 offers four independent, user-programmable event activations. It can be used in a stand-alone configuration that can directly activate wireless PA speakers to play a pre-programmed voice message, trigger wireless beacon and/or corridor lights to provide visual alert and send a detailed text message to wireless LED message boards or staff pager. When operating as part of a paging base station, the CT104 can, in addition to the above, send SMS text messages to staff member cell phone as well as provide full supervision capabilities and low battery alerts to ensure reliable operation at all times.

The CT104 panic button is offered with optional bead necklaces or belt clips. Equipped with a built-in, long lasting Lithium battery, the CT104 provides years of maintenance-free operation.



## CT104 KEY FEATURES



**AUDIO ALERTS**  
Activate PA Messages



**VISUAL ALERTS**  
Control Beacon Lights and  
LED Message Boards



**ALERTS ANYWHERE**  
Detailed Phone or Pager  
Text Alerts



**LONG RANGE**  
Up to 300' Range



**WEARABLE**  
Bead Necklace or Belt Clip  
Option



**LOW MAINTENANCE**  
Long-Life Lithium Battery



VISIPILEX


1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: [INFO@VISIPILEX.COM](mailto:INFO@VISIPILEX.COM)

WEB: [WWW.VISIPILEX.COM](http://WWW.VISIPILEX.COM)

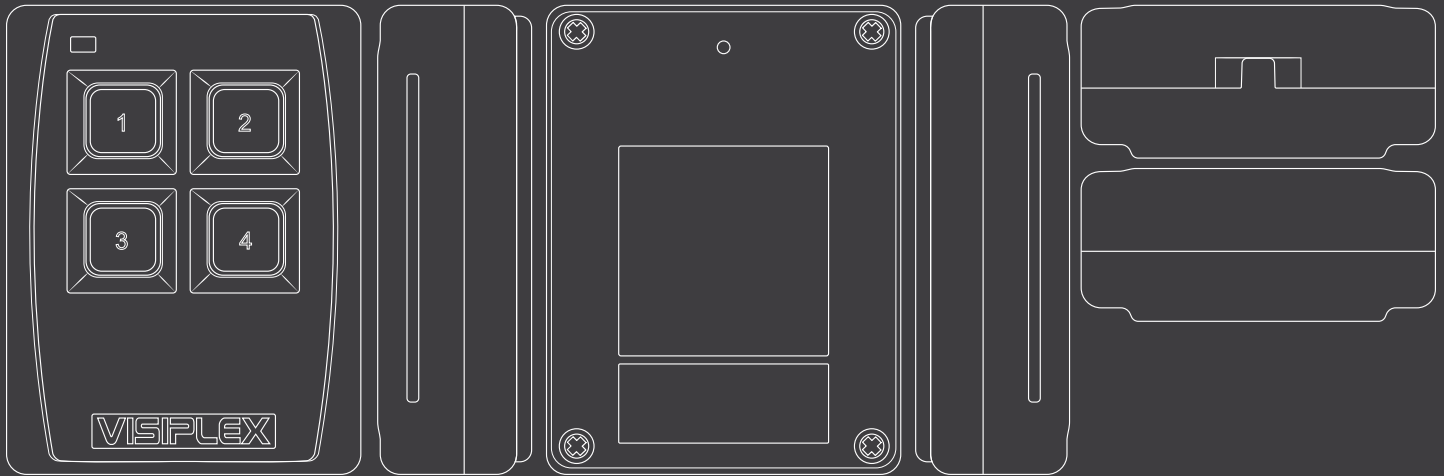

## CT104 SPECIFICATIONS

Parameter	Description
Color	Off-white body, Grey buttons
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	1.8" x 2.4" x 0.8", 46mm x 61mm x 20mm (W x H x D)
Weight	1.6oz, 45g
Power	Single CR2 3V Lithium battery
Operating Conditions	Temperature 10°-130°, Humidity 0-90% non-condensing
RF Power	10 mW
Programming	PC Based programming
Call Cancel	Internal Magnetic Switch
Signalling Time	2-4 Seconds
Stability	Better than 5 PPM
Paging Format	POCSAG, 512, 1200 or 2400 BPS
Channel Spacing	12.5 KHz - Narrow Band
Activation Codes	Calls, Cancel & Low Battery
Options	WPA-1005 (Bead Necklace), WPA-1011 (Belt Clip), WPA-1025 (Programming Cable)
Warranty	One Year Limited Warranty



**VISIPLEX**

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

**PHONE:** 877-918-7243

**FAX:** 847-229-0259

**EMAIL:** INFO@VISIPLEX.COM

**WEB:** WWW.VISIPLEX.COM