

# CT151

## WIRELESS WALL MOUNTED BUTTON Instant Audio/Visual Alerts

*Simple Operation, User-Programmable Alerts, Easy Installation*

The CT151 Wall Mounted Panic Button is a compact, wireless transmitter that can instantly notify staff members when help is needed or initiate a facility-wide alert during emergency situations. The CT151 wall mounted button is designed to function as a stand-alone device or as part of a Visiplex paging base station. When used in a stand-alone configuration, the CT151 can initiate audio/visual emergency alerts, activate pre-programmed voice messages through wireless PA speakers, control wireless beacon lights or send a detailed text message to wireless LED message boards. When being used as part of a Visiplex paging base station, the CT151 can, in addition to the above, send an SMS text message to a staff member's cell phone, activate a dial-out event to play a pre-programmed voice message, and provide supervision monitoring capabilities to ensure reliable operation.

Equipped with a built-in, long lasting Lithium battery, the CT151 wall mounted panic button will provide years of maintenance-free operation while offering wireless functionality supervision and low battery alerts.



## CT151 KEY FEATURES



**AUDIO ALERTS**  
Activate PA Messages



**VISUAL ALERTS**  
Control Beacon Lights and LED Message Boards



**ALERTS ANYWHERE**  
Detailed Phone or Pager Text Alerts



**LONG RANGE**  
Up to 300' Range



**FULLY SUPERVISED**  
Periodic Status Alerts to Monitoring Base Station



**LOW MAINTENANCE**  
Long-Life Lithium Battery




VISIPILEX

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243  
FAX: 847-229-0259

EMAIL: [INFO@VISIPILEX.COM](mailto:INFO@VISIPILEX.COM)  
WEB: [WWW.VISIPILEX.COM](http://WWW.VISIPILEX.COM)

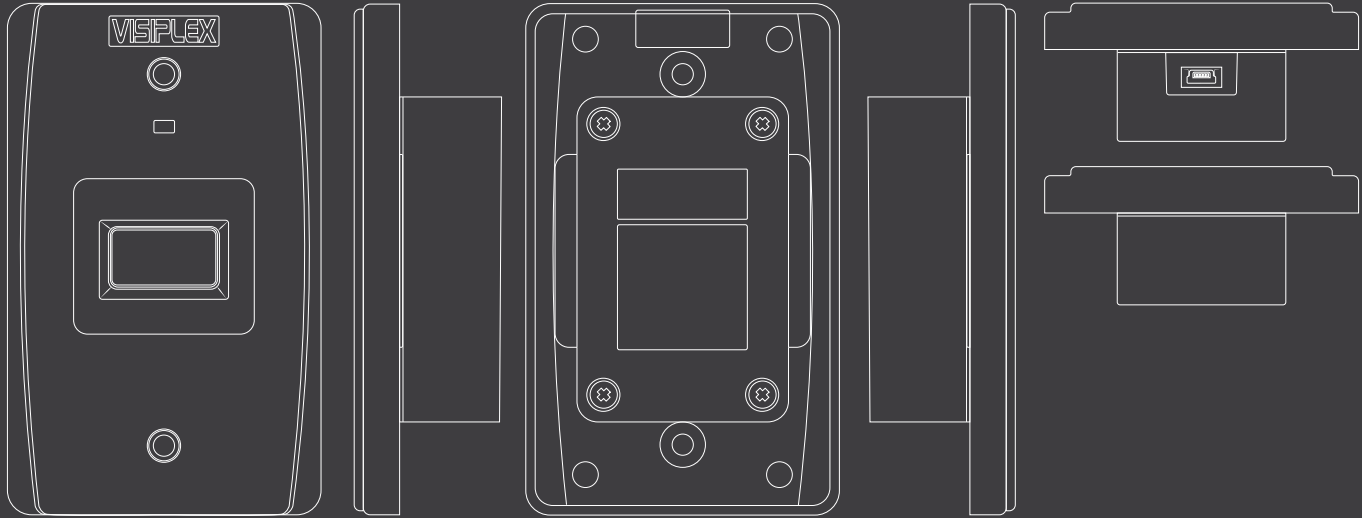

## CT151 SPECIFICATIONS

Parameter	Description
Color	Off-white body, Grey button
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	2.75" x 4.5" x 1.4", 70mm x 114mm x 36mm (W x H x D)
Weight	3.2oz, 90g
Power	Single CR2 3V Lithium battery
Operating Conditions	Temperature 10°-130°, Humidity 0-90% non-condensing
RF Power	10 mW
Programming	PC Based programming
Mounting Options	In-wall or surface mounting, fits one-gang electrical box
Signalling Time	2-4 Seconds
Stability	Better than 5 PPM
Paging Format	POCSAG, 512, 1200 or 2400 BPS
Channel Spacing	12.5 KHz - Narrow Band
Activation Codes	Call & Low Battery
Options	WPA-1003 (Deep Electrical Box), WPA-1015 (Safety Cover), WPA-1025 (Programming Cable)
Warranty	One Year Limited Warranty



**VISIPLEX**

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

**PHONE:** 877-918-7243

**FAX:** 847-229-0259

**EMAIL:** INFO@VISIPLEX.COM

**WEB:** WWW.VISIPLEX.COM