

CT152

WIRELESS WALL MOUNTED BUTTON Instant Audio/Visual Alerts

Simple Operation, User-Programmable Alerts, Easy Installation

The CT152 Wall Mounted Panic Button is a compact, wireless transmitter that can instantly notify staff members when help is needed or initiate a facility-wide alert during emergency situations. With its two button design, the CT152 offers two independent, user-programmable event activations. It can be used in a stand-alone configuration that can initiate audio/visual emergency alerts, activate pre-programmed voice messages through wireless PA speakers, control wireless beacon lights or send a detailed text message to wireless LED message boards. When being used as part of a Visiplex paging base station, the CT152 can, in addition to the above, send an SMS text message to a staff member's cell phone, activate a dial-out event to play a pre-programmed voice message, and provide supervision monitoring capabilities to ensure reliable operation.

Equipped with a built-in, long lasting Lithium battery, the CT152 wall mounted panic button will provide years of maintenance-free operation while offering wireless functionality supervision and low battery alerts.



CT152 KEY FEATURES



AUDIO ALERTS
Activate PA Messages



VISUAL ALERTS
Control Beacon Lights and
LED Message Boards



ALERTS ANYWHERE
Detailed Phone or Pager
Text Alerts



LONG RANGE
Up to 300' Range



FULLY SUPERVISED
Periodic Status Alerts to
Monitoring Base Station



LOW MAINTENANCE
Long-Life Lithium Battery



VISIPILEX


1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPILEX.COM

WEB: WWW.VISIPILEX.COM

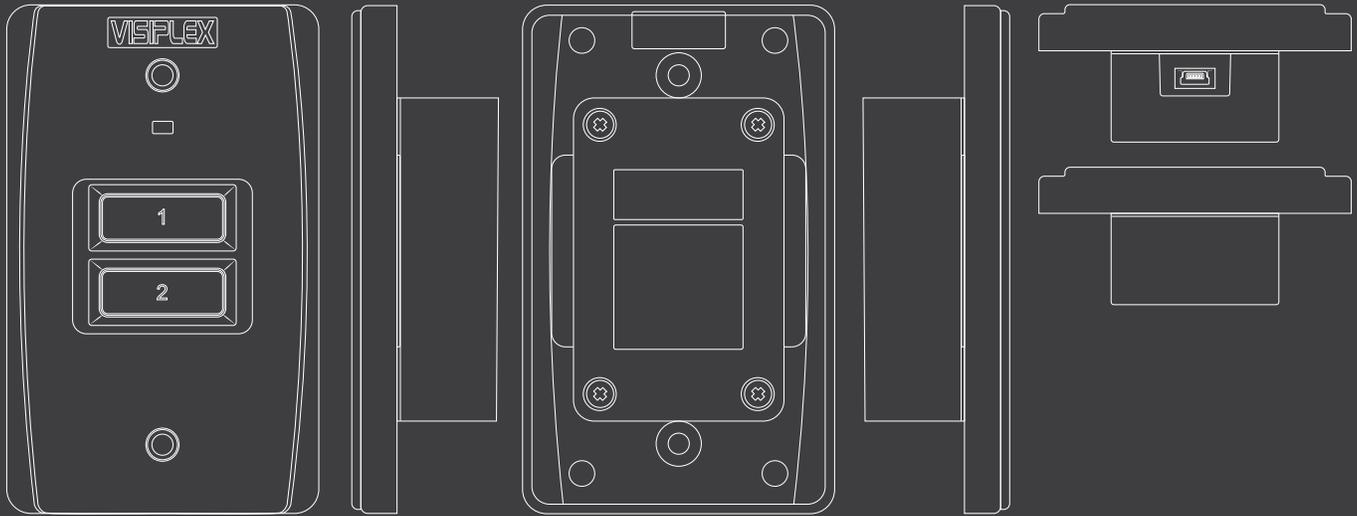

CT152 SPECIFICATIONS

| Parameter | Description |
|----------------------|---|
| Color | Off-white body, Grey buttons |
| Frequency Band | UHF 402-470 MHz |
| Range | 300' |
| Dimensions | 2.75" x 4.5" x 1.4", 70mm x 114mm x 36mm (W x H x D) |
| Weight | 3.2oz, 90g |
| Power | Single CR2 3V Lithium battery |
| Operating Conditions | Temperature 10°-130°, Humidity 0-90% non-condensing |
| RF Power | 10 mW |
| Programming | PC Based programming |
| Mounting Options | In-wall or surface mounting, fits one-gang electrical box |
| Signalling Time | 2-4 Seconds |
| Stability | Better than 5 PPM |
| Paging Format | POCSAG, 512, 1200 or 2400 BPS |
| Channel Spacing | 12.5 KHz - Narrow Band |
| Activation Codes | Calls & Low Battery |
| Options | WPA-1003 (Deep Electrical Box), WPA-1015 (Safety Cover), WPA-1025 (Programming Cable) |
| Warranty | One Year Limited Warranty |



VISIPLEX

1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM