

CT154

WIRELESS WALL MOUNTED BUTTON Instant Audio/Visual Alerts

Simple Operation, User-Programmable Alerts, Easy Installation

The CT154 Wall Mounted Panic Button is a compact, wireless transmitter that can instantly notify staff members when help is needed or initiate a facility-wide alert during emergency situations. With its four button design and optional color coded keypad, the CT154 offers four independent, user-programmable event activations that can correlate with standard emergency color codes. It can be used in a stand-alone configuration that can initiate audio/visual emergency alerts, activate pre-programmed voice messages through wireless PA speakers, control wireless beacon lights or send a detailed text message to wireless LED message boards. When being used as part of a Visiplex paging base station, the CT154 can also send an SMS text message to a staff member's cell phone, activate a dial-out event to play a pre-programmed voice message, and provide supervision monitoring capabilities to ensure reliable operation.

Equipped with a built-in, long lasting Lithium battery, the CT154 wall mounted panic button will provide years of maintenance-free operation while offering wireless functionality supervision and low battery alerts.



CT154 KEY FEATURES



AUDIO ALERTS
Activate PA Messages



VISUAL ALERTS
Control Beacon Lights and
LED Message Boards



ALERTS ANYWHERE
Detailed Phone or Pager
Text Alerts



LONG RANGE
Up to 300' Range



FULLY SUPERVISED
Periodic Status Alerts to
Monitoring Base Station



LOW MAINTENANCE
Long-Life Lithium Battery



VISIPILEX


1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPILEX.COM

WEB: WWW.VISIPILEX.COM

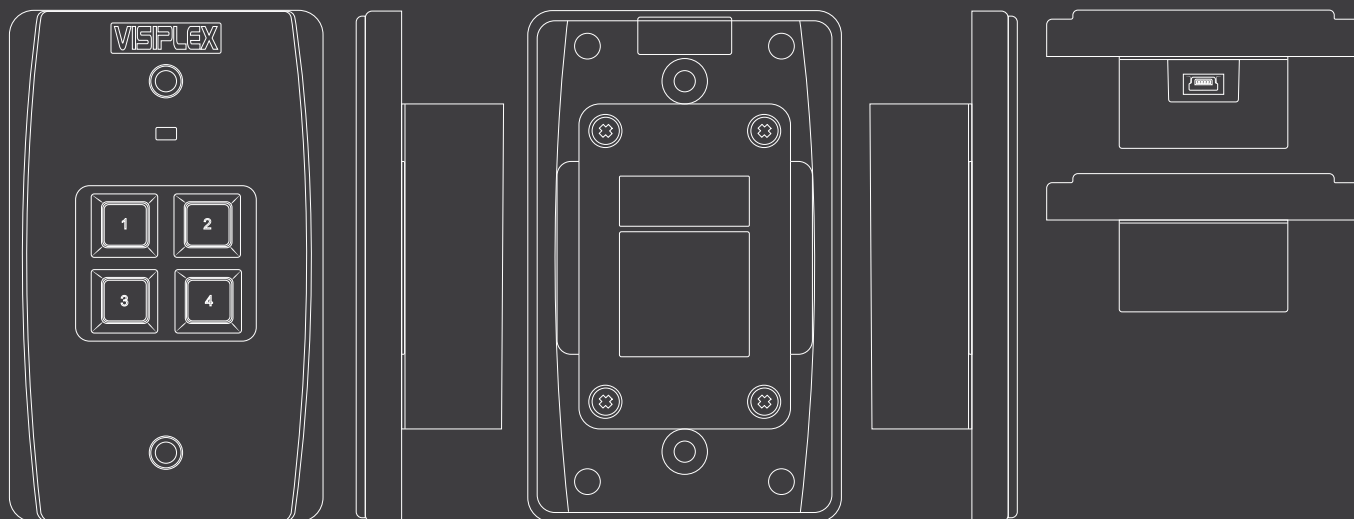

CT154 SPECIFICATIONS

Parameter	Description
Color	Off-white body, Grey buttons or Red 1 Button, Blue 2 Button, Green 3 Button, and Yellow 4 Button
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	2.75" x 4.5" x 1.4", 70mm x 114mm x 36mm (W x H x D)
Weight	3.2oz, 90g
Power	Single CR2 3V Lithium battery
Operating Conditions	Temperature 10°-130°, Humidity 0-90% non-condensing
RF Power	10 mW
Programming	PC Based programming
Mounting Options	In-wall or surface mounting, fits one-gang electrical box
Signalling Time	2-4 Seconds
Stability	Better than 5 PPM
Paging Format	POCSAG, 512, 1200 or 2400 BPS
Channel Spacing	12.5 KHz - Narrow Band
Activation Codes	Calls & Low Battery
Options	WPA-1003 (Deep Electrical Box), WPA-1015 (Safety Cover), WPA-1025 (Programming Cable), WPA-1036 (Color-Coded Keypad)
Warranty	One Year Limited Warranty



VISIPLEX

1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM