

# CT155

## WIRELESS WALL MOUNTED PULL CORD Instant Audio/Visual Alerts

*Simple Operation, User-Programmable Alerts, Easy Installation*

The CT155 Wireless Pull Cord Nurse Call is a compact wall-mounted transmitter that can instantly alert caregivers or staff members when help is needed. The CT155 is designed to function as a standalone device or as part of a Visiplex's paging base station. When used in a standalone configuration, the CT155 can directly send a detailed text message to caregiver pager or a central LED message board, activate beacon or corridor lights to help identify the call's origin, or activate pre-programmed voice messages through wireless PA speakers. When operating as part of a paging base station, the CT155 can, in addition to the above, send SMS text message to staff member cell phone, activate 2-way intercom voice communication between the patient room and the main office, and provide full supervision capabilities to ensure reliable operation at all times.

Equipped with a built-in, long lasting Lithium battery, the CT155 will provide years of maintenance-free operation, while offering wireless functionality supervision.



## CT155 KEY FEATURES



**AUDIO ALERTS**  
Activate PA Messages



**VISUAL ALERTS**  
Control Beacon Lights and  
LED Message Boards



**ALERTS ANYWHERE**  
Detailed Phone or Pager  
Text Alerts



**LONG RANGE**  
Up to 300' Range



**FULLY SUPERVISED**  
Periodic Status Alerts to  
Monitoring Base Station



**LOW MAINTENANCE**  
Long-Life Lithium Battery



**VISIPILEX**


1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

**PHONE:** 877-918-7243

**FAX:** 847-229-0259

**EMAIL:** [INFO@VISIPILEX.COM](mailto:INFO@VISIPILEX.COM)

**WEB:** [WWW.VISIPILEX.COM](http://WWW.VISIPILEX.COM)

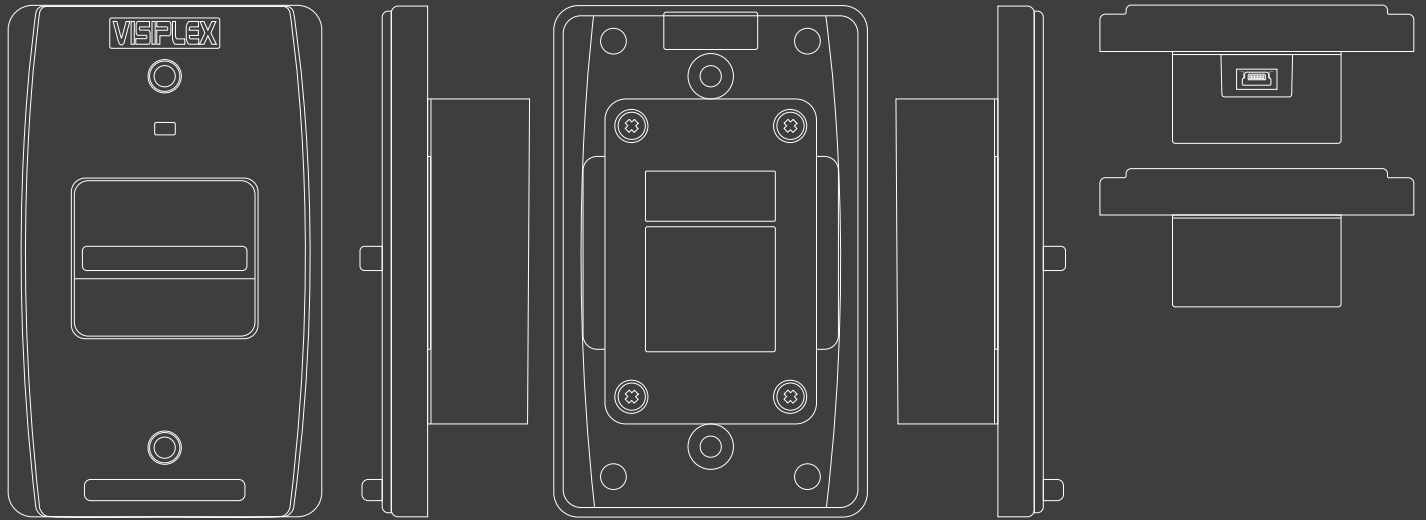

## CT155 SPECIFICATIONS

Parameter	Description
Color	Off-white body, White pull cord, Red Switch (Standard), Amber Switch, Blue Switch, Green Switch, Black Switch (Optional)
Frequency Band	UHF 402-470 MHz
Range	300'
Dimensions	2.75" x 4.5" x 1.6", 70mm x 114mm x 41mm (W x H x D); Cord Length: 6', 1.8m
Weight	3.5oz, 100g
Power	Single CR2 3V Lithium battery
Operating Conditions	Temperature 10°-130°, Humidity 0-90% non-condensing
RF Power	10 mW
Programming	PC Based programming
Mounting Options	In-wall or surface mounting, fits one-gang electrical box
Signalling Time	2-4 Seconds
Stability	Better than 5 PPM
Paging Format	POCSAG, 512, 1200 or 2400 BPS
Channel Spacing	12.5 KHz - Narrow Band
Activation Codes	Call, Cancel & Low Battery
Options	WPA-1003 (Deep Electrical Box), WPA-1025 (Programming Cable)
Warranty	One Year Limited Warranty



**VISIPLEX**

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243  
FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM  
WEB: WWW.VISIPLEX.COM