



TS1521 - Wireless PA Speaker / Bell with 14" Synchronized Clock



Key Features:

- Viewing Distance of 100'
- Automatic Daylight Saving Time Adjustment
- Built-In Wireless Speaker
- Pre-Programmed Voice Messages and Alert Tones
- User-Programmable Voice Messages*
- Tamper-Proof Plexiglass Clock Lens
- Quick Correction for Time Change (1-3 Minutes)
- Battery Operated Clock (Optional AC Power Adaptor)
- Customized Clock Logo Option


The **TS1521 Wireless Public Address Speaker/Bell with 14" Synchronized Clock** is designed to provide a highly visible time display while maintaining the ability to activate audible alerts and announcements.

The TS1521 receives a wireless time signal transmitted daily from a main wireless paging controller, such as the **VS4800**. The TS1521 uses the time signal to automatically adjust itself, if necessary, to ensure accurate and synchronized time.

The TS1521 supports 8 activation codes (ID's) for individual activation or membership activation in up to 7 separate groups. Creating groups provides the ability to activate multiple devices using a single transmission from a main paging controller.

The TS1521 provides an internal battery power backup with the **VNS2252** option for reliable operation during power failure.

In addition, the **VNS2271** option allows the user to store custom voice messages and alerts into the **VNS2200** wireless audio/visual controller's memory. This option is optimal for unique alerts or pre-determined emergency voice messaging.

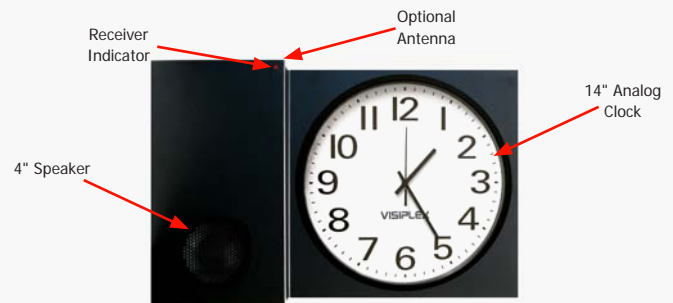

Options, Accessories and Complementary Products:

Part Number	Description
TS-OPT-003	24-Hour Clock Face
TS-OPT-004	Customized Analog Clock Face
TS-OPT-007	110 V AC Adaptor (Replaces Original Clock Batteries, Requires 1.5" Minimum Recessed Power Outlet)
TS-OPT-011	Red Second Hand
VNS2252	Internal Battery Backup
VNS2255	External Antenna
VNS2271	Expanded Memory (8.5 Minutes of Stored Audio @ 10 kbps/second, Divided into Equally-Timed Memory Slots)

Specifications:

Dimensions	22.5" x 14.5" x 3.4" (W x H x D)	Frequency Response	50 Hz - 16 KHz (10 Hz - 3400 Hz in Live Voice Mode)
Weight	6.4 lbs.	Frequency	VHF (148 - 174 MHz), UHF (400 - 470 MHz)
Power	12V DC / 3A (Using 100-240V AC)	Paging Format	POCSAG, Narrow Band
Operating Temperature	32° - 120°F	Synchronization	1 Time/Day (Optional 6 Times/Day, User Selectable)
Humidity	0% - 95%, Non-Condensing	Receiver Sensitivity	10u V/M
Frame and Lens	Black Metal Frame, Polycarbonate Clock Frame	Activation Codes	8
Viewing Distance	100 ft.	Limited Warranty	One Year Parts and Labor
Clock Dial Face	12.5", White		

*Specifications Are Subject to Change Without Notification