

# VNS1630

## WIRELESS LED MESSAGE BOARD

### Text Messages, Alerts and Time Display

*Compact Design, Visual Alerts, Synchronized Time*



The Visiplex VNS1630 Wireless LED Message Board is an alphanumeric display that provides easy message and time viewing to accommodate a wide variety of applications, such as public text messaging, emergency alerts, and time display. A unique, integrated PA speaker option enables the VNS1630 to play live voice broadcasts, pre-recorded messages and initiate scheduled bell alerts. Fully controlled by wireless commands from a Visiplex paging base station, this message board can enhance communication efforts during emergencies and day-to-day operations for any type of organization, such as schools, office buildings, warehouses and commercial facilities. These displays are able to be wall mounted or shelf mounted and are powered by AC Outlet or low-voltage POE. Display LED lights are available in Red, Green, and Blue.

## VNS1630 KEY FEATURES



### CONFIGURABLE

1-2 lines of text with many font and display options



### ACCURATE TIME

Time synchronized with base station



### AUDIO ALERTS

Integrated PA speaker for alerts and announcements



### BREAK BELLS

Plays scheduled, synchronized break bells



### BATTERY BACKUP

Built-in backup for power outages



### COLOR OPTIONS

Available in Red, Green, and Blue LED



VISIPILEX

1287 BARCLAY BLVD


BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: [INFO@VISIPILEX.COM](mailto:INFO@VISIPILEX.COM)

WEB: [WWW.VISIPILEX.COM](http://WWW.VISIPILEX.COM)

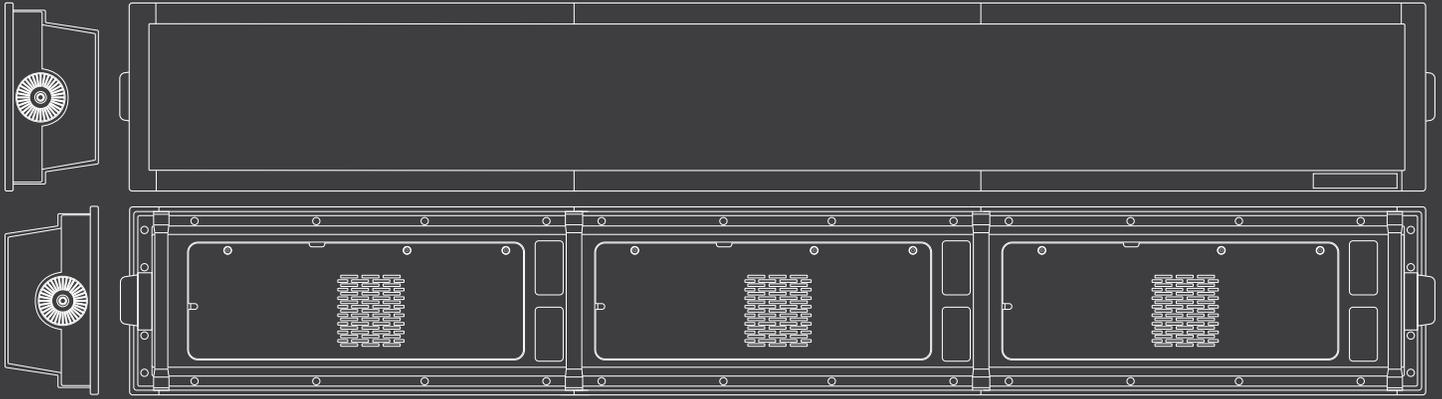

## VNS1630 SPECIFICATIONS

Parameter	Description
Color	Off-White; Red LED text display (Blue or Green options)
Frequency Band	UHF 402-470 MHz
Dimensions	44.9" x 6.4" x 3.2", 1142mm x 163mm x 82mm (W x H x D); Maximum font height 4.8", 122mm
Weight	138oz, 3912g; With battery backup: 158oz, 4479g
Power	12V DC Using 100-240V AC, POE option
Operating Conditions	Temperature 0°-120°, Humidity 0-95% non-condensing
Audio Output	Built-in, high-power, high fidelity speaker. Frequency range: 85 to 12000 Hz
Programming	USB Port or Over-the-air wireless commands from main paging base station
Mounting Options	Wall mounting with included bracket, Shelf mounting
Paging Format	POCSAG, 512 or 1200 BPS
Channel Spacing	12.5 KHz - Narrow Band
Options	VNS1683 (Integrated PA Speaker), VNS1681 (Built-in battery backup), VNS1685 (Integrated Break Bells)
Warranty	One Year Limited Warranty



**VISIPLEX**

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

**PHONE:** 877-918-7243

**FAX:** 847-229-0259

**EMAIL:** INFO@VISIPLEX.COM

**WEB:** WWW.VISIPLEX.COM