




VNS2205 - Wireless Outdoor Strobe Light

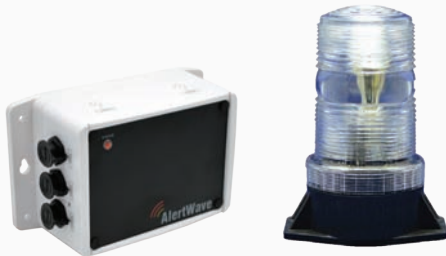

The **VNS2205 Wireless Outdoor Strobe Light** is designed to provide high-impact visual alerts for indoor and outdoor locations.


The VNS2205 simply requires power for installation, and has PoE power or solar panel power options available as well. With the VNS2282 option, the VNS2205 is capable of controlling two strobe lights instead of one.

The **VNS2252** backup battery option allows the VNS2205 to continue working in the event of power loss.

For NFPA-72 compliance and easy maintenance, the VNS2205, with the **VNS2254** option, offers full wireless supervision from the main paging controller. This provides the system administrator with a detailed functionality status of each installed VNS2205 device (requires VNS5100).

Key Features:

- NFPA-72 (2010) Compliant
- Weather-Resistant Enclosure
- Drives One or Two Strobe Lights
- Power Failure Protection with Backup Battery
- Solar or PoE Network Power Source Options
- Clear, Blue, Red and Amber Color Options

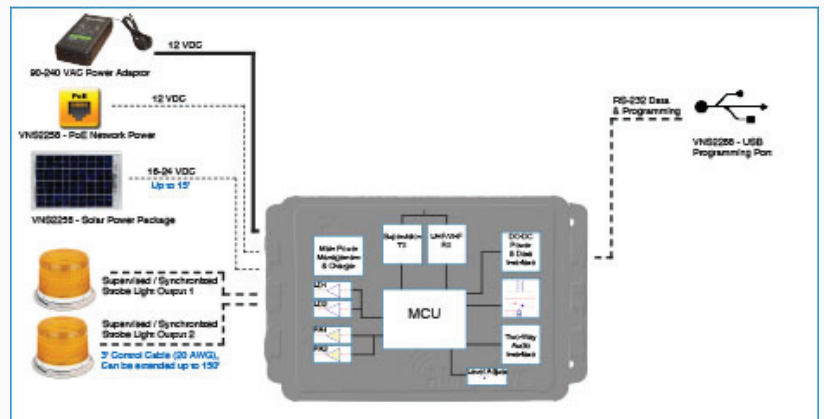

Specifications:

Controller Dimensions	7.5" x 4.5" x 3.0" (W x H x D), (Adaptor: 2.5" x 8" x 1.5"), Adaptor Cable: 6 ft., Power Cable: 6 ft.	Controller Weight	1.9 lbs. (3.3 lbs. with Internal Battery)
Strobe Light Dimensions	3.95" x 5.4" x 2.8" (W x H x D)	Strobe Light Weight	0.5 lbs.
Strobe Light Color(s)	Clear, Blue, Red, Amber	Programming	RS-232 Serial Port, Optional USB Port
Controller Color	Light Gray	Transmit Format	POCSAG 512/1200 BPS
Operating Temperature	0° - 120°F	Frequency Response	50 Hz - 16 KHz (10 Hz - 3400 Hz in Live Voice Mode)
Humidity	0% - 95%, Non-Condensing	Frequency	VHF (148 - 174 MHz), UHF (400 - 470 MHz)
DC Voltage Output	12V DC, 1A Max	Activation Codes	8
Connectors	Sealed DIN Connectors	Limited Warranty	One Year Parts and Labor

*Specifications Are Subject to Change Without Notification