

# VNS2410

## WIRELESS TWO-WAY INTERCOM Instant Voice Communication

*Simple Operation, Easily Expandable, Reliable Communication*

The Visiplex VNS2410 Wireless Intercom Station is designed to provide multi-level buildings, schools and commercial sites with the ability to initiate and receive two-way intercom calls to/from a main office base station.

The VNS2410 intercom station can help reach people across your facility for emergency alerts, two-way voice communication, overhead paging and scheduled break bell notifications to keep everyone safe and informed. Designed as a wireless solution, an AC power outlet is all that is needed. This makes installation, addition or relocation of VNS2410 intercom stations a simple task.

The VNS2410 also comes with the options for hands-free or handset operation. Hands-free allows users to respond to the base without using the call button. The handset allows users more privacy in their conversations.



## VNS2410 KEY FEATURES



### TWO-WAY VOICE

Voice communication with main base station



### AUDIO ALERTS

Works as PA speaker for alerts and announcements



### HANDS-FREE

Respond without use of push-to-talk button



### FULLY SUPERVISED

Periodic Status Alerts to Monitoring Base Station



### POWER OPTIONS

Power with an AC outlet or low-voltage POE



### BATTERY BACKUP

Built-in backup for power outages



VISIPILEX


1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: [INFO@VISIPILEX.COM](mailto:INFO@VISIPILEX.COM)

WEB: [WWW.VISIPILEX.COM](http://WWW.VISIPILEX.COM)

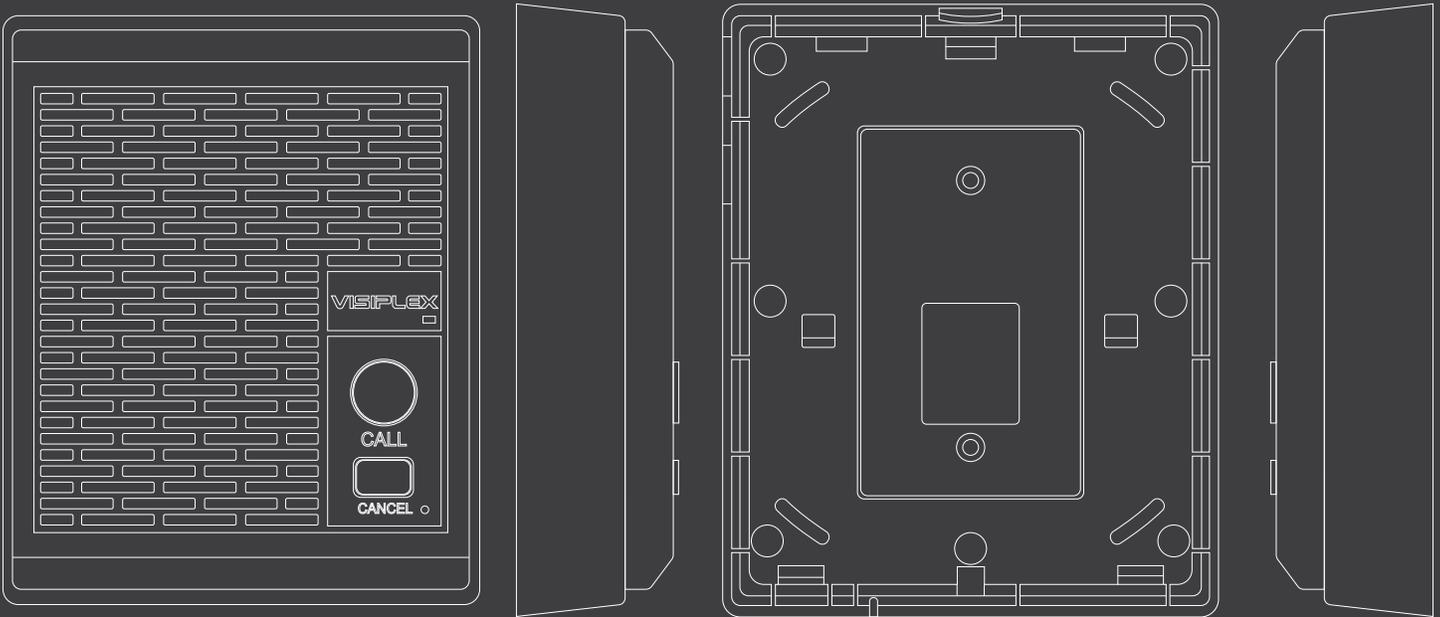

## VNS2410 SPECIFICATIONS

| Parameter            | Description  |
|----------------------|--|
| Color                | Light Grey with off-white mounting bracket   |
| Frequency Band       | UHF 402-470 MHz  |
| Range                | 300'   |
| Dimensions           | 6" x 7.3" x 1.9", 153mm x 185mm x 48mm (W x H x D)                                     |
| Weight               | 22oz, 625g; With battery backup: 26oz, 735g  |
| Power                | 9V DC Using 100-240V AC, POE option  |
| Operating Conditions | Temperature 0°-120°, Humidity 0-95% non-condensing                                     |
| Audio                | 4W Speaker   |
| Programming          | USB Port or Over-the-air wireless commands from main paging base station               |
| Mounting Options     | Surface mounting, fits standard electrical box   |
| Paging Format        | POCSAG, 512 or 1200 BPS  |
| Channel Spacing      | 12.5 KHz - Narrow Band   |
| Data Cable           | 25', CAT-5   |
| Options              | VNS2486 (Hands-Free), VNS2481 (Built-in battery backup), VNS2491 (Handset for privacy) |
| Warranty             | One Year Limited Warranty  |



**VISIPLEX**

1287 BARCLAY BLVD  
BUFFALO GROVE, IL 60089

**PHONE:** 877-918-7243

**FAX:** 847-229-0259

**EMAIL:** INFO@VISIPLEX.COM

**WEB:** WWW.VISIPLEX.COM