




## VPR-02 - Wireless Dome Light

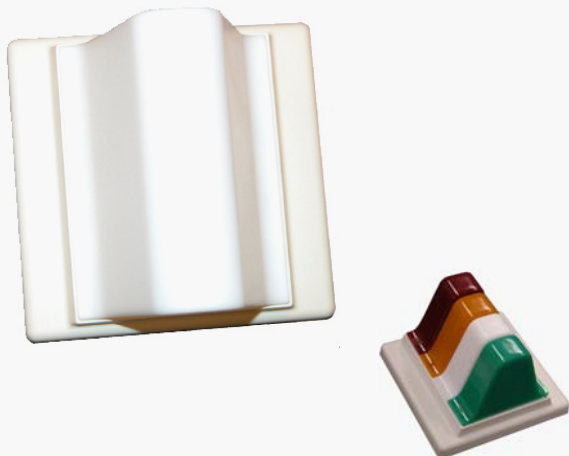

The **VPR-02 Wireless Dome Light** is designed to provide visual status indications and is controlled by wireless commands sent from a main wireless paging controller, such as the **VS4800**.

The VPR-02 supports 6 activation codes (ID's) for individual activation or membership activation in 5 separate groups. Creating groups provides the ability to activate multiple devices using a single transmission from the main paging controller.

Each of the VPR-02 lenses can be controlled individually and set to On, Off or Flash mode.

### Key Features:

- Lights Set to On, Off or Flash Mode
- Wall and Ceiling Mount

### Options, Accessories and Complementary Products:

Part Number	Description
Other	Multi-Colored Lenses: Red, Amber, White, Green

### Specifications:

Dimensions	4.5" x 4.5" x 2.9" (W x H x D)	Frequency	VHF (150 - 174 MHz), UHF (402 - 470 MHz)
Weight	1.45 lbs.	Programming	Windows Hyperterminal
Power	5V DC / 1 A	Signalling Time	2-4 Seconds
Light Output	One Lens (Optional 2 or 4 Lenses)	Paging Format	POCSAG, Narrow Band
Color	White (Optional Multi-Color)	Data Baud Rate	512 or 1200 BPS
Operating Temperature	32° - 120°F	Activation Codes	6
Mounting	Standard Double Gang Electrical Box	Limited Warranty	One Year Parts and Labor

\*Specifications Are Subject to Change Without Notification