

VNS2210

WIRELESS PA CONTROLLER Controller for Wireless Remote Devices

All-in-One Controller to Drive Visiplex Products, Customized for your Needs

The Visiplex VNS2210 Wireless Audio/Visual PA Controller is designed to control and activate remote devices, such as: public address speakers, beacon lights, sirens, intercom wall stations and more. When receiving wireless commands from a Visiplex paging base station or call button, the VNS2210 controller can drive indoor/outdoor PA speakers to play pre-programmed voice messages or live voice announcements, provide two-way voice intercom communication with a designated main office, activate strobe lights, sirens and more.

The VNS2210 wireless PA controller can be activated and controlled individually or as a part of up to seven groups/zones for flexible unit activation from a main wireless paging controller or personal/wall-mount compact transmitters.



VNS2210 KEY FEATURES



AUDIO ALERT CONTROL

Drives one or two PA Speakers or Sirens



VISUAL ALERT CONTROL

Drives one or two Beacon lights



BATTERY BACKUP

Built-in backup for power outages



EASY INTEGRATION

Interface with existing fire alarm or PA system



POWER OPTIONS

Power with an AC outlet or low-voltage POE



FULLY SUPERVISED

Periodic Status Alerts to Monitoring Base Station



VISIPILEX


1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPILEX.COM

WEB: WWW.VISIPILEX.COM

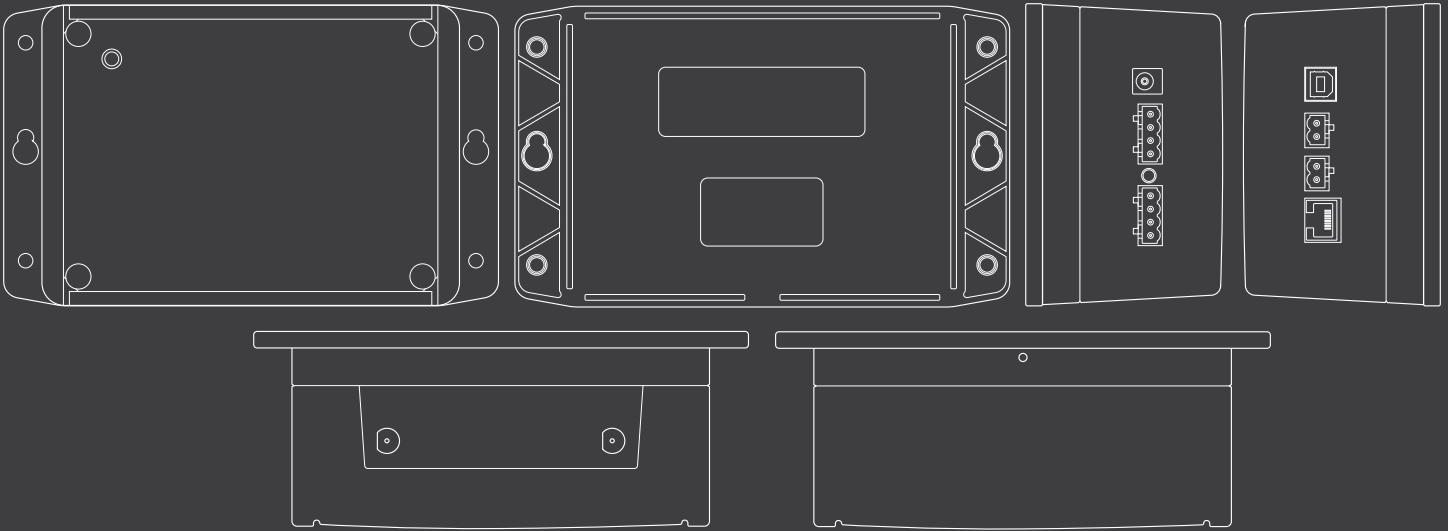

VNS2210 SPECIFICATIONS

Parameter	Description
Color	Off-White and Black
Frequency Band	UHF 402-470 MHz, VHF 150-174 MHz
Dimensions	7.5" x 4.5" x 3.0", 191mm x 114mm x 76mm (W x H x D)
Weight	15oz, 410g; With battery backup: 35oz, 975g
Power	12V DC 1A (Using 100-240V AC), POE option
Operating Conditions	Temperature 0°-120°, Humidity 0-95% non-condensing
Alert Signal Format	POCSAG 512 or 1200 BPS
Channel Spacing	12.5 KHz - Narrow Band
Programming	USB port or Over-The-Air wireless commands from paging base station

Options

VNS2252 (Built-in battery backup power), VNS2254 (Built-in supervision transmitter), VNS2265 (Built-in receiver for FM Radio reception), VNS2281 (Second Speaker PA Driver) VNS2282 (Strobe light/siren controlled output), VNS2284 (Local PA system/fire alarm interface), VNS2285 (Dry contact closure output), VNS2286 (Two-Way radio interface), VNS2287 (Two-way radio [pair] with charger), VNS2259 (POE power supply with battery), VNS2267 (Two-Way intercom wall station), VNS2268 (Two-Way, hands-free intercom wall station)

Warranty One Year Limited Warranty



VISIPLEX

1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM