

VNS2211

WIRELESS BREAK BELL CONTROLLER Compact Bell System

Cost-Efficient Break Bell System Solution

The VNS2211 is a compact bell controller that is designed to provide a low-cost solution to initiate bell tone and voice alerts through attached audio speakers according to a pre-programmed bell schedule. This break bell controller comes with a built-in power backup battery and the ability to activate an old mechanical bell if needed. Visiplex offers a selection of Public Address Speakers that match the VNS2211 controller to provide easy installation for indoor and outdoor bell applications.

The VNS2211 Bell Schedule can be programmed from any PC and can be setup to weekly bell events schedule or calendar design where each day of the year can be programmed with a different bell schedule.

The VNS2211 Bell Controller comes with a built-in paging receiver that can receive wireless time synchronization signals to update its internal clock and remote activation of bell alert if needed.



VNS2211 KEY FEATURES



AUDIO ALERT CONTROL
Drives one or two PA Speakers or Sirens



USER-PROGRAMMABLE
Voice and tone alerts with up to 100 alerts per day



BATTERY BACKUP
Built-in backup for power outages



EASY INTEGRATION
Can control existing mechanical bell system



POWER OPTIONS
Power with an AC outlet or low-voltage POE



ALERTS WHEN NEEDED
Programmable weekly or calendar based schedule



VISIPILEX


1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPILEX.COM

WEB: WWW.VISIPILEX.COM

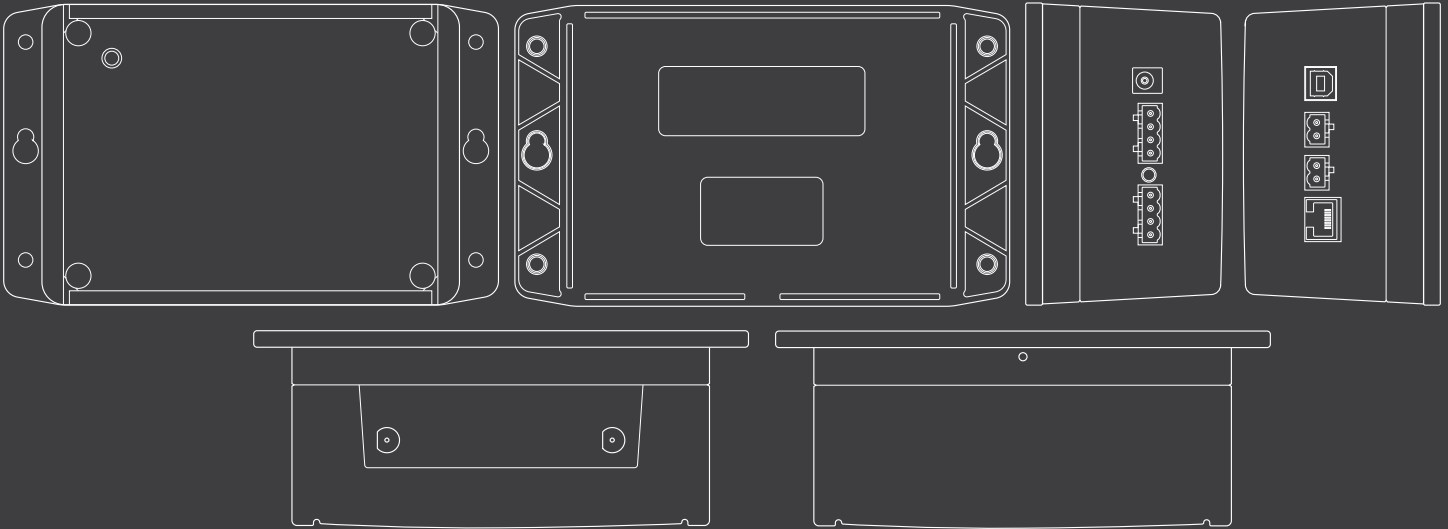

VNS2211 SPECIFICATIONS

Parameter	Description
Color	Off-White and Black
Frequency Band	UHF 400-470 MHz, VHF 148-174 MHz
Dimensions	7.5" x 4.5" x 3.0", 191mm x 114mm x 76mm (W x H x D)
Weight	53oz, 1503g
Power	12V DC 1A (Using 100-240V AC), POE option
Operating Conditions	Temperature 0°-120°, Humidity 0-95% non-condensing
Alert Signal Format	POCSAG 512 or 1200 BPS
Channel Spacing	12.5 KHz - Narrow Band
Frequency Response	50 Hz - 16 KHz (10 Hz - 3400 Hz in Live Voice Mode)
Audio	50W Peak output for 4-16 Ohms Speaker
Programming	USB Port
Warranty	One Year Limited Warranty



VISIPLEX

1287 BARCLAY BLVD
BUFFALO GROVE, IL 60089

PHONE: 877-918-7243

FAX: 847-229-0259

EMAIL: INFO@VISIPLEX.COM

WEB: WWW.VISIPLEX.COM